

Qty	A-Model Size	B-Outside Frame Dimensions		C-Wall Opening Dimensions		Ship Wt. in lbs	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 3/8"	6 3/8"	4	1
	8" x 8"	10"	10"	8 3/8"	8 3/8"	4	1
	8" x 12"	10"	14"	8 3/8"	2 3/8"	6	1
	10" x 10"	12"	12"	10 3/8"	10 3/8"	6	1
	12" x 12"	14"	14"	12 3/8"	12 3/8"	7	1
	12" x 16"	14"	18"	12 3/8"	16 3/8"	9	1
	12" x 18"	14"	20"	12 3/8"	18 3/8"	10	1
	12" x 24"	14"	26"	12 3/8"	24 3/8"	12	2
	14" x 14"	16"	16"	14 3/8"	14 3/8"	9	1
	16" x 16"	18"	18"	16 3/8"	16 3/8"	11	1
	16" x 20"	18"	22"	16 3/8"	20 3/8"	13	2
	18" x 18"	20"	20"	18 3/8"	18 3/8"	12	1
	20" x 24"	22"	26"	20 3/8"	24 3/8"	15	2
	20" x 30"	22"	32"	20 3/8"	30 3/8"	20	4
	22" x 22"	24"	24"	22 3/8"	22 3/8"	17	7
	22" x 30"	24"	32"	22 3/8"	30 3/8"	22	4
	22" x 36"	24"	38"	22 3/8"	36 3/8"	24	5
	24" x 24"	26"	26"	24 3/8"	24 3/8"	18	4
	24" x 30"	26"	32"	24 3/8"	30 3/8"	22	5
	24" x 36"	26"	38"	24 3/8"	36 3/8"	25	5
	30" x 30"	32"	32"	30 3/8"	30 3/8"	30	5
	36" x 36"	38"	38"	36 3/8"	36 3/8"	41	5
	36" x 48"	38"	50"	36 3/8"	48 3/8"	51	6

Model TM for Masonry, Tile and Wallboard is an all purpose 16 gauge steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The exposed 1" frame flange adds rigidity and conceals rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place. Nails, bolts or masonry anchors may be used to fasten the TM model securely in place.



**SPECIFICATIONS**

**TM: Standard Panel (Wall or Ceiling)**

**Frame:** 16 gauge steel with paintable 1" wall flange. 1-5/8" depth.  
**Door:** 16 gauge steel mounted with 90° continuous, concealed hinge.  
**Finish:** Gray baked enamel primer.  
**Lock:** Flush screwdriver-operated steel cam - C.



**TMS: Standard Stainless Steel Panel (Wall or Ceiling)**

**Frame:** 16 gauge, stainless steel with 1" wall flange. 1-5/8" depth.  
**Door:** 16 gauge stainless steel mounted with with 90° continuous, concealed hinge.  
**Finish:** #4 Satin finish stainless steel  
**Lock:** Flush screwdriver-operated steel cam - C.


**OPTIONAL FEATURES AT ADDITIONAL COST:**

- Optional colors - see color chart
- Double door
- Louvered vents
- Plexi-glass view window
- (TMG)Galvanized finish
- (HH) Hex head cam (with or without pin):
- (SHC) Spanner head cam
- (KK) Knob cam
- (MP) Mortise can lock prep
- (UMI) Mortise slam lock prep
- (LLI) Mortise deadbolt prep
- (L) Cylinder lock with 2 keys  
(can be key-coordinated to fit JL fire extinguisher cabinets as well)
- Rainhood
- Gasketing

Special sizes and special modification can be fabricated upon request. For information on security access panels: See [Access Panel Catalog](#).

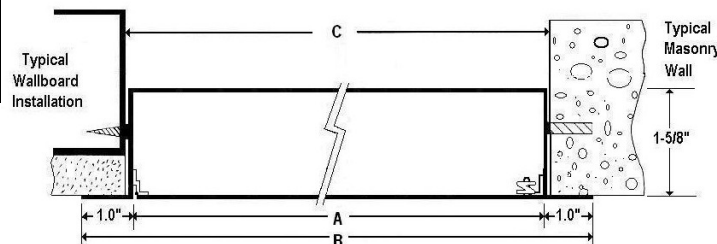

OPTIONAL CYLINDER LOCK

 <p><b>JL INDUSTRIES</b></p>	<p><b>ACTIVAR</b> INC.</p> <p>A DIVISION OF</p> <p>www.activarcpg.com</p> <p>Construction Products Group</p>	Distributor:	Quantity:
		Contractor:	Approved By:
		Model #:	Architect:
		Project:	Date:
<p>HEADQUARTERS: 4450 WEST 78<sup>TH</sup> ST CIRCLE, BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: JL@JLINDUSTRIES.COM WWW.ACTIVARCPG.COM</p> <p>ACPG SOUTHEAST (THOMAS ENTERPRISES): FT MEYERS, FL PH: 239-693-7500 FAX: 239-693-7501</p>			